

RPS – 7000

4-Quadrant AC/DC Source Regenerative AC/DC Load Regenerative Grid Simulator



KEY FEATURES

- Output Power: 6 kVA – 22.5 kVA
- Output Voltage: 0 – 350 V; 0 – 400 V (Optional)
- Frequency: DC, 15– 100 Hz; 15 – 1500 Hz (Optional)
- Maximum current increased by 35%
- Key component cooling efficiency + 20%
- Parallel connection for high power capacity
- Output Modes: Single-phase, three-phase, or split-phase (up to 200% of rated voltage)
- Three Operating Modes: Constant Voltage, Constant Current, and Constant Power
- LIST, STEP, PULSE, and TRANSIENT modes
- Arbitrary Waveform Editing & Power Line Disturbance (PLD) Simulation
- Harmonic disturbance/waveform superposition
- Harmonic Analysis: Voltage and current measurements up to the 50th harmonic
- Compliant with Grid Connection Standards such as LVRT, Phase Shift, Frequency Variation, Harmonic Injection
- Standards Compliance: IEC 61000 -3-2/-3-3/-3-11/-3-12/-4-11/-4-13/-4-14/-4-28/-4-34 testing
- Interfaces Supported: USB, LAN, GPIB, CAN, and Std I/O

Applications:

- AI server, Data center, and HDVC applications
- EV chargers, BOBC, V2G, V2H, V2X, EV charging cables and components
- Solar PV inverters, grid-connected inverters, and wind power systems
- Industrial and residential Energy Storage Systems (ESS), Power Conversion Systems (PCS)
- Uninterruptible Power Supplies (UPS) and Power Distribution Units (PDUs)
- Regulatory Testing: IEEE 1547, UL 1741, IEC 62116, etc.
- Micro-grid Testing, PHIL (Power Hardware-in-the-Loop), and Anti-Islanding Protection.

Introduction

The RPS-7000 is a high-performance regenerative AC/DC power source and load system designed for advanced power testing applications. It supports four-quadrant operation, enabling both source and load functions with energy recovery back to the grid. With power ratings from 6kVA to 22.5kVA per unit and up to 112.5kVA through parallel operation, the RPS-7000

Platform	Application Example	Conventional 35A Systems	RPS-7000 Series (48A per Phase)
1 ϕ 7.4kW (230V / EU)	Residential AC Charger / OBC	2 UNITS	1 UNIT ✓
3 ϕ 11kW (208V / US)	Commercial AC Charger / OBC	2 UNITS	1 UNIT ✓
3 ϕ 22kW (208V / US)	High-Power AC Charger / OBC	3 UNITS	2 UNITS ✓

Figure 1: More Current. Fewer Units.

delivers high current, precise waveform control, and reliable performance for AI servers, EV charging, energy storage, and power electronics validation. Available configurations include G Series, L Series, S Series, and B Series.

Applications

The RPS-7000 Series provides comprehensive testing support for modern power electronics R&D and production. In the renewable energy sector, it serves as a critical tool for testing Solar PV inverters, Power Conversion Systems (PCS), and Energy Storage Systems (ESS), enabling precise grid anomaly simulation and efficient energy recovery. Its 4-quadrant operation is also ideal for verifying the bidirectional charging and discharging performance of On-board Chargers (OBC/BOBC) and various V2G, V2H, and V2X equipment.

For digital infrastructure, the RPS-7000 is an optimized power solution for AI servers, Data Centers, and High-Voltage Direct Current (HVDC) applications. Supporting AC, DC, and AC+DC modes, it accurately simulates the voltage ripples and load transients of high-voltage DC buses, ensuring the power stability of high-density computing hardware. Furthermore, the built-in regulatory waveform library automates compliance testing for IEEE 1547 and UL 1741, facilitating everything from basic performance verification to advanced Power Hardware-in-the-Loop (PHIL) simulations.

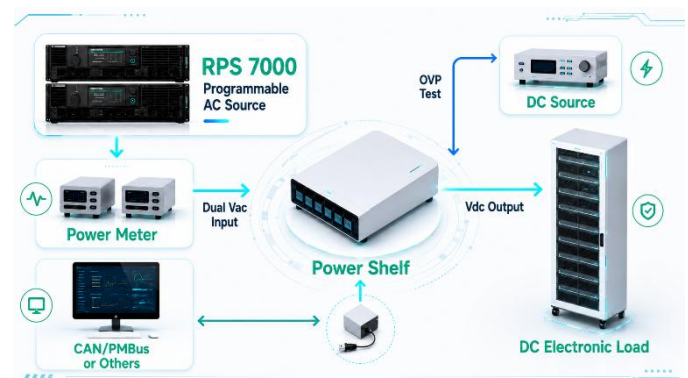


Figure 2: Power Shelf Test Architecture

Constant Power and High Current output

The RPS-7000 utilizes next-generation SiC MOS technology, supporting voltages up to 400 VL-N, and for higher voltage applications such as wind power systems, line voltages up to 690 VL-L. Its constant power output capability ensures high current at low output voltages and low current at high output voltages, eliminating the need for manual switching between high and low voltage ranges. Compared to traditional systems that experience output interruptions during range transitions, the RPS-7000 provides seamless operation for real-world

applications.

Compared to floor-standing products (such as the RPS-5000 series), which have advantages in volume, thermal management, and system architecture cost, the rack-mounted version of the RPS-7000 offers benefits in terms of power density, compactness, and standard rack compatibility. It is suitable for laboratory and medium-to-low power applications. Compared to commercial 3U products, the RPS-7000 can deliver up to 22.5 kVA per unit. Addressing the limitation of insufficient current output at low voltage, it improves current output by 15%, covering a wider range of testing requirements (as shown in Figure 3).



Figure 3: Full Power Across the Voltage Range

Parallel Connection for High Power

The RPS-7000 supports multi-unit parallel operation to increase power output rating, meeting a wide range of testing requirements. Using real-time active current-sharing technology powered by a Digital Signal Processor (DSP) and high-speed communication, the system can achieve up to 54 kVA of total power. When operating in parallel, all functionalities and precision remain unaffected. Additionally, the units can be connected with a single cable, and upon enabling the parallel mode, the system automatically configures itself without requiring complex additional setup.

Intuitive Control & Advanced Analysis

The RPS-7000 features a 5-inch touchscreen paired with a physical rotary knob, providing an intuitive interface for seamless switching between waveform editing, real-time measurements, and regulatory configurations. This user-friendly design allows for rapid system familiarization and efficient operation across diverse testing environments.

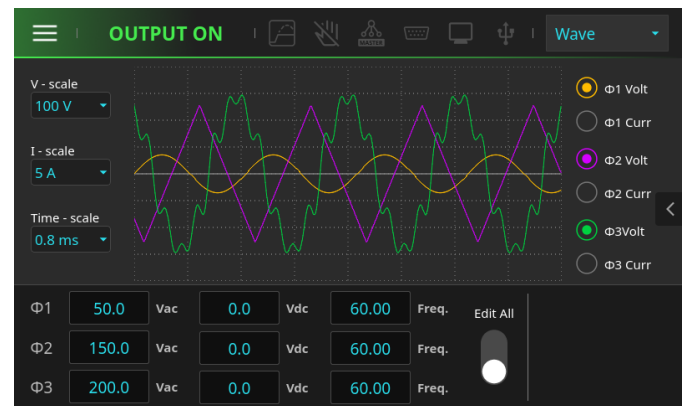


Figure 4: Waveform Monitoring Function

For optimized product design, the RPS-7000 integrates real-time waveform monitoring and high-precision harmonic analysis, eliminating the need for external oscilloscopes. It can simultaneously capture and display three-phase voltage and current waveforms, providing immediate visibility into system performance.

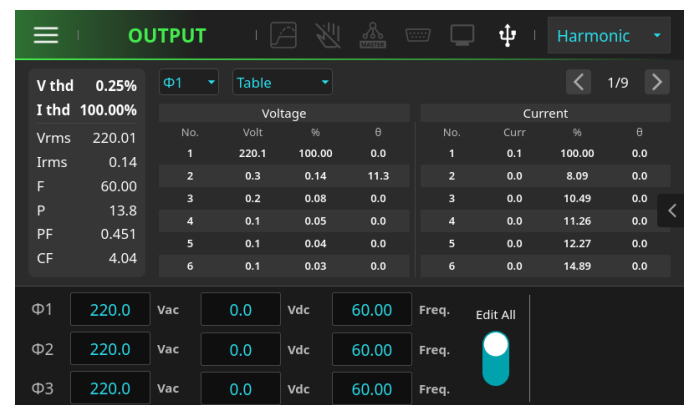


Figure 5: Harmonic Real-time Analysis List

The series also offers advanced diagnostic capabilities, including total harmonic distortion (THD)

measurement and detailed analysis up to the 50th harmonic. By providing precise amplitude and phase data for individual harmonic components, the RPS-7000 empowers engineers to accurately identify and mitigate interference, ensuring the highest level of power quality and compliance.

AC/DC Load Simulation

The RPS-7000 Model L regenerative electronic load is suitable for a wide range of renewable energy testing applications. In addition to basic functions such as constant current, constant power, and constant impedance, it supports advanced load simulation capabilities, including inductive and capacitive load emulation, as shown in Figure 6. Users can simulate complex load scenarios to accurately test device performance under varying voltage and current conditions, including load angles, load removal, and cycle settings.

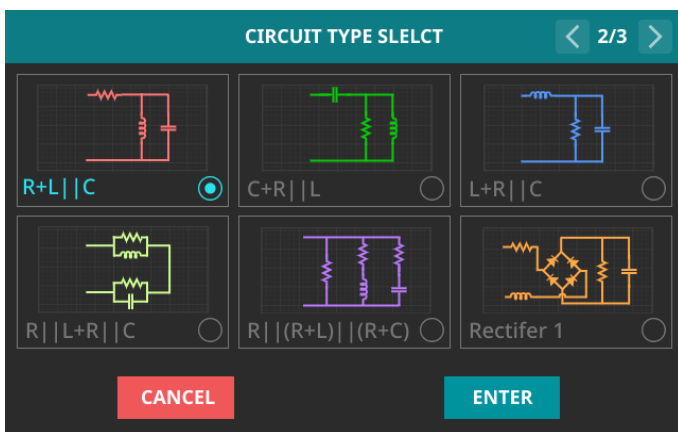


Figure 6: Multi-Mode Load Simulation

Moreover, its unique integrated harmonic and disturbance simulation can generate various harmonic components to evaluate the power supply's capability to handle diverse harmonic loads.

Combined with the versatility of AC/DC load simulation, the RPS-7000 Model L meets diverse application needs, such as testing electric vehicle supply equipment (EVSE), onboard chargers (OBC),

and uninterruptible power supplies (UPS). Its regenerative design eliminates the energy wastage and cooling requirements typical of traditional resistive loads, significantly enhancing efficiency.

Arbitrary waveform Editing

RPS-7000 Series provides advanced programmable power simulation for R&D, compliance, and laboratory applications. It supports List, Step, Pulse, Transient, Harmonic Synthesis, and Inter-Harmonic modes with independent phase control, enabling flexible test scenarios while supporting compliance verification to standards including IEC 61000-4-3, IEC 61000-4-11, UL 1741 SA, IEEE 1547, and IEC 62116.

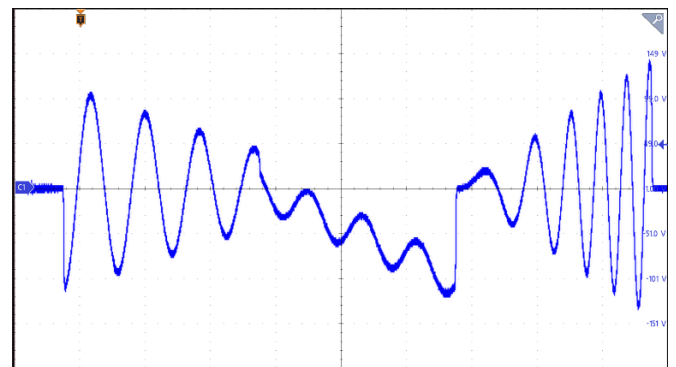


Figure 7: List Mode Waveform

Step mode, which incrementally adjusts voltage or frequency to evaluate the device's response under different conditions. Pulse mode, which generates short-duration high-voltage or high-current pulses for surge testing. Additionally, the Inter-Harmonic mode simulates harmonic disturbances in power systems to assess the device's tolerance to harmonic interference, while the Transient mode replicates instantaneous power system responses to test the device's ability to handle rapid changes effectively. Synthesis mode provides flexible custom waveform design functions.

Users can use the intuitive programming

interface to accurately adjust the amplitude and phase of each harmonic order to generate a multi-order harmonic composite waveform. This mode supports up to 50th order harmonic components, helping testers simulate non-sinusoidal power environments to meet different testing needs.

PowerVUE for Remote Control

The RPS-7000 is equipped with PC-based software, PowerVUE, which allows users to operate the device directly from their PC. With PowerVUE, users can easily adjust parameters, monitor performance, quickly create test programs, and generate reports. The software also provides pre-configured test modes for standards such as IEC 61000-4-11, 4-13, 4-14, 4-28, and 4-34. This enables users to operate the system according to regulation-defined parameters, ensuring compliance with various international standards.

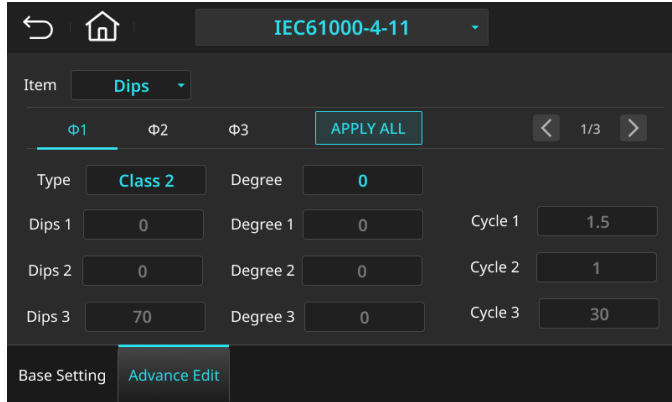


Figure 9: IEC61000-4-11 Dips Setting

Standard SCPI & LabVIEW driver support

The RPS-7000 supports the SCPI standard protocol, enabling seamless integration into existing test systems via GPIB, LAN, or External IO interfaces using SCPI commands without requiring complex modifications. Additionally, the RPS-7000 supports LabVIEW for testing, measurement, and control applications.

AIoT Intelligent Predictive Diagnostics

PowerSense AI enables real-time health monitoring and Predictive Preventive Service (PPS), continuously analyzing system behavior to detect hidden risks before failure occurs. By identifying abnormal trends in power modules, cooling systems, and operational parameters, it helps maximize equipment availability beyond 95%, reduce unplanned downtime, and protect critical R&D schedules.



Figure 10: PowerSense Predictive Diagnostics

PowerVUE for Remote Control

Manufactured in Taiwan under IEC 62443-4-1, TL 9000, ISO 27001, and IATF 16949 certified systems. Every RPS-7000 Series unit undergoes rigorous engineering verification and validation workflows aligned with TÜV standards, ensuring consistent performance, production quality, and long-term reliability in demanding test environments.



Figure 11: Certified Quality & Engineering Validation

Model	Out Voltage Vac		Output Current (Aac)		Output Power (Pac)	Phase	Height
	V L-N	V L-L	Arms(1Ø)	Arms(3Ø)			
RPS-7012	350V	606V	105A	35A	12kVA	3Ø,1Ø,Split phase	3U
RPS-7015	350V	606V	120A	40A	15kVA	3Ø,1Ø,Split phase	3U
RPS-7018	350V	606V	144A	48A	18kVA	3Ø,1Ø,Split phase	3U
RPS-7022	350V	606V	144A	48A	22.5kVA	3Ø,1Ø,Split phase	3U
RPS-7045	350V	606V	288A	96A	45kVA	3Ø,1Ø,Split phase	6U
RPS-7067	350V	606V	432A	144A	67.5kVA	3Ø,1Ø,Split phase	15U
RPS-7090	350V	606V	576A	192A	90kVA	3Ø,1Ø,Split phase	25U
RPS-7112	350V	606V	720A	240A	112.5kVA	3Ø,1Ø,Split phase	25U

Engineered for the Next Power Era

- **+30%** Power Density
- **+35%** Output Current
- Up to **90%** Efficiency
- **0%** derating across 220V to 480V
- Advanced Arbitrary Waveform Control
- AIoT-Driven Predictive Monitoring & Maintenance

RPS7225: 225kVA 42U



Conventional System Size

RPS7112: 112kVA 24U



RPS7067: 67kVA 15U

RPS7045: 45kVA 6U



Technical Specifications

Item		RPS-7012	RPS-7015	RPS-7018		
AC INPUT	Phase	3Ø3W				
	Voltage	200 - 240 VL-L ± 10%				
		380 - 400 VL-L ± 10%				
		440 - 480 VL-L ± 10%				
	Frequency	47 - 63Hz				
Max. Current	47A/phase (200 - 240 VL-L ± 10%)	58A/phase (200 - 240 VL-L ± 10%)	70A/phase (200 - 240 VL-L ± 10%)			
	25A/phase (380 - 480 VL-L ± 10%)	31A/phase (380 - 480 VL-L ± 10%)	38A/phase (380 - 480 VL-L ± 10%)			
Power Factor(*1)	0.99(Typical)					
AC OUTPUT	Phase Modes	3Ø, 1Ø or Split phase selectable				
	Max. Power	12kVA/8kVA(Split phase)	15kVA/10kVA(Split phase)	18kVA/12kVA(Split phase)		
	Per Phase/Channel	4kVA	5kVA	6kVA		
AC VOLTAGE	Range	0 - 350VL-N, 0 - 606VL-L, 0-700VL-L(Split phase) Option : 0 - 400VL-N, 0 - 692VL-L, 0-800VL-L(Split phase)				
	Resolution	0.1V				
	Setting Accuracy	± (0.1% of setting + 0.2% F.S.)				
	Total Harmonic Distortion (THD)(*2)	<0.5% @ 50/60Hz				
		<1% @ 30-1000Hz				
	Line Regulation (*3)	± 0.1%				
	Load Regulation (*4)	± 0.2%				
	Phase Angle	Range	0 - 359.9°			
Resolution		0.1°				
MAX. AC CURRENT	RMS(*5)	105A(1Ø)/35A(3Ø/Split)	120A(1Ø)/40A(3Ø/Split)	144A(1Ø)/48A(3Ø/Split)		
	Peak	315A(1Ø)/105A(3Ø/Split)	360A(1Ø)/120A(3Ø/Split)	432A(1Ø)/144A(3Ø/Split)		
	Crest Factor	3	3	3		
FREQUENCY	Range	DC, 15.00 - 100.0 Hz Option : DC, 15.00 - 1500.0 Hz				
	Resolution	0.01Hz				
	Accuracy(*6)	± 0.01% F.S				
DC OUTPUT	Max. Power	12kW/8kW (Split phase)	15kW/10kW(Split phase)	18kW/12kW(Split phase)		
	Per Phase/Channel	4kW	5kW	6kW		
DC VOLTAGE	Range	±495VDC, ±990VDC(Split phase) Option : ±565VDC, ±1130VDC(Split phase)				
	Resolution	0.1V				
	Setting Accuracy	± (0.1 % of setting + 0.2% F.S.)				
MAX. DC CURRENT	Range	78.75A(1Ø)/26.25A(3Ø/Split)	90A(1Ø)/30A(3Ø/Split)	108A(1Ø)/36A(3Ø/Split)		
HARMONIC SYNTHESIS FUNCTION	up to 50 Harmonic orders @ 50/60Hz fundamental frequency					
REGENERATIVE FUNCTION	Current Total Harmonic Distortion (iTHD)(*7)	<6%(Typical)	<5%(Typical)	<5%(Typical)		
	Power Factor(*8)	>0.97(Typical)				
CURRENT LIMIT FUNCTION	Setting	Range	1Ø	0.1 - 105A	0.1 - 120.0A	0.1 - 144.0A
		3Ø/Split phase	0.1 - 35A	0.1 - 40.0A	0.1 - 48.0A	
	Resolution	0.1A				
	Accuracy	± (2.0% of setting + 0.5% F.S.)				
Response Time	< 0.5s					
MEASUREMENT	Voltage (AC)	Range	0 - 350VL-N, 0 - 606VL-L, 0 - 700VL-L(Split) Option : 0 - 400VL-N, 0 - 692VL-L, 0 - 800VL-L(Split)			
		Resolution	0.01V			
		Accuracy	± (0.1% of reading + 0.2% F.S.) at Voltage > 5V			

Item		RPS-7012	RPS-7015	RPS-7018		
MEASUREMENT	Voltage (DC)	Range	±495VDC, ±990VDC (Split phase) / Option : ±565VDC, ±1130VDC (Split phase)			
		Resolution	0.01V			
		Accuracy	± (0.1 % of reading + 0.2% F.S.) at Voltage > 5V			
	Current (AC,DC)	Range	1Ø	0.00 - 105.00A	0.00 - 120.00A	0.00 - 144.00A
			3Ø/Split phase	0.00 - 35.00A	0.00 - 40.00A	0.00 - 48.00A
		Resolution	0.01A			
	Peak Current	Range	1Ø	0.0 - 315.0Apk	0.0 - 360.0Apk	0.0 - 432.0Apk
			3Ø/Split phase	0.0 - 105.0Apk	0.0 - 120.0Apk	0.0 - 144.0Apk
		Accuracy	± (0.4% of reading + 0.3% F.S.)			
	Power (AC,DC)	Range	1Ø	0.0W - 12kW	0.0W - 15kW	0.0W - 18kW
			3Ø	0.0W - 4kW	0.0W - 5kW	0.0W - 6kW
			Split phase	0.0W - 8kW	0.0W - 10kW	0.0W - 12kW
	Resolution		0.1W at 0.0 - 9999.9W / 1W at Power ≥10000W			
	Accuracy		± (0.4% of reading + 0.4% F.S.)			
	Power Apparent (VA)	Range	1Ø	0.0W - 12kVA	0.0W - 15kVA	0.0W - 18kVA
			3Ø	0.0W - 4kVA	0.0W - 5kVA	0.0W - 6kVA
			Split phase	0.0W - 8kVA	0.0W - 10kVA	0.0W - 12kVA
	Resolution		0.1VA at 0.0 - 9999.9VA / 1VA at Power ≥10000VA			
	Accuracy		V×A, Calculated value			
	Power Factor	Range	0 -1.000			
Resolution		0.001				
Accuracy		W / VA ,Calculated and displayed to three significant digits				
Crest Factor	Range	0 - 10.00				
	Resolution	0.01				
	Accuracy	Ap / A ,Calculated and displayed to two significant digits				
GENERAL	Interface	USB, Ethernet, External I/O(DB25), Option: GPIB, CAN Bus				
	Display	Full Color, Touch LCD Display, 5" Diagonal size, 800 x 400 Pixels resolution				
	Protection	OCP, OVP, OPP, OTP, SHORT, FAN				
	V Sense	Yes				
	Efficiency (*9)	90% (Typical)				
	Dimension(H x W x D)	132.8 x 432 x 718 mm				
	Weight	60kg				
ENVIRONMENTAL	Cooling	Variable speed fan cooled, front intake, rear exhaust				
	Operating Temperature	0 to 40°C				
	Storage Temperature	-40 to 85°C				
	Altitude	2000m (6500 feet)				
	Operating Humidity(*10)	0% to 95% RAH				
REGULATORY COMPLIANCE	Safety	Low Voltage Directive 2014/30/EU, EN 61010-1:2017				
	EMC	CE marked for EMC Directive 2014/30/EU per EN 61326-1:2013 Class A				
	CE Mark LVD Categories	Installation Overvoltage Category: II; Pollution Degree: 2; indoor use only.				

Note.

- *1 Tested on input voltage 380Vac with full output power
- *2 Maximum distortion is tested on output voltage 350Vac with full output power under linear load
- *3 With respect to changes in the rated range of input voltage.
- *4 Load regulation is tested by sine wave and remote sense
- *5 At working voltage 125V

- *6 When the output voltage is greater than 40V
- *7 Current total harmonic distortion is tested on input voltage 220Vac with full output power
- *8 Power factor is tested on input voltage 220Vac with full output power
- *9 Efficiency is tested on input voltage 380V and output voltage 250Vac with full output power under linear load
- *10 In the state of non-condensing

The above specifications are subject to change without prior notice.

Technical Specifications

Item		RPS-7022	RPS-7045	
AC INPUT	Phase	3Ø3W		
	Voltage	380 - 400 VL-L ± 10% 440 - 480 VL-L ± 10%		
	Frequency	47 - 63Hz		
	Max. Current	54A/phase (380 - 480 VL-L ± 10%)	108A/phase (380 - 480 VL-L ± 10%)	
	Power Factor(*1)	0.99(Typical)		
AC OUTPUT	Phase Modes	3Ø, 1Ø or Split phase selectable		
	Max. Power	22.5kVA/15kVA(Split phase)	45kVA/30kVA(Split phase)	
	Per Phase/Channel	7.5kVA	15kVA	
AC VOLTAGE	Range	0 - 350VL-N, 0 - 606VL-L, 0-700VL-L(Split phase) Option : 0 - 400VL-N, 0 - 692VL-L, 0-800VL-L(Split phase)		
	Resolution	0.1V		
	Setting Accuracy	± (0.1% of setting + 0.2% F.S.)		
	Total Harmonic Distortion (THD)(*2)	<0.5% @ 50/60Hz <1% @ 30-1000Hz		
	Line Regulation (*3)	± 0.1%		
	Load Regulation (*4)	± 0.2%		
	Phase Angle	Range	0 - 359.9°	
		Resolution	0.1°	
MAX. AC CURRENT	RMS(*5)	144A(1Ø)/48A(3Ø/Split)	288A(1Ø)/96A(3Ø/Split)	
	Peak	432A(1Ø)/144A(3Ø/Split)	864A(1Ø)/288A(3Ø/Split)	
	Crest Factor	3	3	
FREQUENCY	Range	DC, 15.00 - 100.0 Hz Option : DC, 15.00 - 1500.0 Hz		
	Resolution	0.01Hz		
	Accuracy(*6)	± 0.01% F.S		
DC OUTPUT	Max. Power	22.5kW/15kW (Split phase)	45kW/30kW(Split phase)	
	Per Phase/Channel	7.5kW	15kW	
DC VOLTAGE	Range	±495VDC, ±990VDC(Split phase) Option : ±565VDC, ±1130VDC(Split phase)		
	Resolution	0.1V		
	Setting Accuracy	± (0.1 % of setting + 0.2% F.S.)		
MAX. DC CURRENT	Range	108A(1Ø)/36A(3Ø/Split)	216A(1Ø)/72A(3Ø/Split)	
HARMONIC SYNTHESIS FUNCTION	up to 50 Harmonic orders @ 50/60Hz fundamental frequency			
REGENERATIVE FUNCTION	Current Total Harmonic Distortion (iTHD)(*7)	<6%(Typical)	<5%(Typical)	
	Power Factor(*8)	>0.97(Typical)		
CURRENT LIMIT FUNCTION	Setting	Range 1Ø	0.1 - 144.0A	
		3Ø/Split phase	0.1 - 48.0A	
	Resolution	0.1A		
	Accuracy	± (2.0% of setting + 0.5% F.S.)		
Response Time	< 0.5s			
MEASUREMENT	Voltage (AC)	Range	0 - 350VL-N, 0 - 606VL-L, 0 - 700VL-L(Split) Option : 0 - 400VL-N, 0 - 692VL-L, 0 - 800VL-L(Split)	
		Resolution	0.01V	
		Accuracy	± (0.1% of reading + 0.2% F.S.) at Voltage > 5V	

Item		RPS-7022	RPS-7045	
MEASUREMENT	Voltage (DC)	Range	±495VDC, ±990VDC (Split phase) / Option : ±565VDC, ±1130VDC (Split phase)	
		Resolution	0.01V	
		Accuracy	± (0.1 % of reading + 0.2% F.S.) at Voltage > 5V	
	Current (AC,DC)	Range	1Ø	0.00 - 144.00A
			3Ø/Split phase	0.00 - 48.00A
		Resolution	0.01A	
		Accuracy	± (0.4% of reading + 0.3% F.S.)	
	Peak Current	Range	1Ø	0.0 - 432.0Apk
			3Ø/Split phase	0.0 - 144.0Apk
		Resolution	0.1A	
		Accuracy	± (0.4% of reading + 0.6% F.S.)	
	Power (AC,DC)	Range	1Ø	0.0W - 22.5kW
			3Ø	0.0W - 7.5kW
			Split phase	0.0W - 15kW
		Resolution	0.1W at 0.0 - 9999.9W / 1W at Power ≥10000W	
	Accuracy	± (0.4% of reading + 0.4% F.S.)		
	Power Apparent (VA)	Range	1Ø	0.0W - 22.5kVA
			3Ø	0.0W - 7.5kVA
			Split phase	0.0W - 15kVA
		Resolution	0.1VA at 0.0 - 9999.9VA / 1VA at Power ≥10000VA	
Accuracy	V×A, Calculated value			
Power Factor	Range	0 -1.000		
	Resolution	0.001		
	Accuracy	W / VA ,Calculated and displayed to three significant digits		
Crest Factor	Range	0 - 10.00		
	Resolution	0.01		
	Accuracy	Ap / A ,Calculated and displayed to two significant digits		
GENERAL	Interface	USB, Ethernet, External I/O(DB25), Option: GPIB, CAN Bus		
	Display	Full Color, Touch LCD Display, 5" Diagonal size, 800 x 400 Pixels resolution		
	Protection	OCP, OVP, OPP, OTP, SHORT, FAN		
	V Sense	Yes		
	Efficiency (*9)	90% (Typical)		
	Dimension(H x W x D)	132.8 x 432 x 718 mm		
	Weight	60kg		
ENVIRONMENTAL	Cooling	Variable speed fan cooled, front intake, rear exhaust		
	Operating Temperature	0 to 40°C		
	Storage Temperature	-40 to 85°C		
	Altitude	2000m (6500 feet)		
	Operating Humidity(*10)	0% to 95% RAH		
REGULATORY COMPLIANCE	Safety	Low Voltage Directive 2014/30/EU, EN 61010-1:2017		
	EMC	CE marked for EMC Directive 2014/30/EU per EN 61326-1:2013 Class A		
	CE Mark LVD Categories	Installation Overvoltage Category: II; Pollution Degree: 2; indoor use only.		

Note.

- *1 Tested on input voltage 380Vac with full output power
- *2 Maximum distortion is tested on output voltage 350Vac with full output power under linear load
- *3 With respect to changes in the rated range of input voltage.
- *4 Load regulation is tested by sine wave and remote sense
- *5 At working voltage 125V

- *6 When the output voltage is greater than 40V
- *7 Current total harmonic distortion is tested on input voltage 220Vac with full output power
- *8 Power factor is tested on input voltage 220Vac with full output power
- *9 Efficiency is tested on input voltage 380V and output voltage 250Vac with full output power under linear load
- *10 In the state of non-condensing

The above specifications are subject to change without prior notice.

Technical Specifications

Item		RPS-7067	RPS-7090	
AC INPUT	Phase	3Ø3W		
	Voltage	380 - 400 VL-L ± 10% 440 - 480 VL-L ± 10%		
	Frequency	47 - 63Hz		
	Max. Current	162A/phase (380 - 480 VL-L ± 10%)	216A/phase (380 - 480 VL-L ± 10%)	
	Power Factor(*1)	0.99(Typical)		
AC OUTPUT	Phase Modes	3Ø, 1Ø or Split phase selectable		
	Max. Power	67.5kVA/45kVA(Split phase)	90kVA/60kVA(Split phase)	
	Per Phase/Channel	22.5kVA	30kVA	
AC VOLTAGE	Range	0 - 350VL-N, 0 - 606VL-L, 0-700VL-L(Split phase) Option : 0 - 400VL-N, 0 - 692VL-L, 0-800VL-L(Split phase)		
	Resolution	0.1V		
	Setting Accuracy	± (0.1% of setting + 0.2% F.S.)		
	Total Harmonic Distortion (THD)(*2)	<0.5% @ 50/60Hz <1% @ 30-1000Hz		
	Line Regulation (*3)	± 0.1%		
	Load Regulation (*4)	± 0.2%		
	Phase Angle	Range	0 - 359.9°	
		Resolution	0.1°	
MAX. AC CURRENT	RMS(*5)	432A(1Ø)/144A(3Ø/Split)	576A(1Ø)/192A(3Ø/Split)	
	Peak	1296A(1Ø)/432A(3Ø/Split)	1728A(1Ø)/576A(3Ø/Split)	
	Crest Factor	3	3	
FREQUENCY	Range	DC, 15.00 - 100.0 Hz Option : DC, 15.00 - 1500.0 Hz		
	Resolution	0.01Hz		
	Accuracy(*6)	± 0.01% F.S		
DC OUTPUT	Max. Power	67.5kW/45kW (Split phase)	90kW/60kW(Split phase)	
	Per Phase/Channel	22.5kW	30kW	
DC VOLTAGE	Range	±495VDC, ±990VDC(Split phase) Option : ±565VDC, ±1130VDC(Split phase)		
	Resolution	0.1V		
	Setting Accuracy	± (0.1 % of setting + 0.2% F.S.)		
MAX. DC CURRENT	Range	324A(1Ø)/108A(3Ø/Split)	432A(1Ø)/144A(3Ø/Split)	
HARMONIC SYNTHESIS FUNCTION	up to 50 Harmonic orders @ 50/60Hz fundamental frequency			
REGENERATIVE FUNCTION	Current Total Harmonic Distortion (iTHD)(*7)	<6%(Typical)	<5%(Typical)	
	Power Factor(*8)	>0.97(Typical)		
CURRENT LIMIT FUNCTION	Setting	Range	1Ø 0.1 - 432.0A	0.1 - 576.0A
		3Ø/Split phase	0.1 - 144.0A	0.1 - 192.0A
	Resolution	0.1A		
	Accuracy	± (2.0% of setting + 0.5% F.S.)		
Response Time	< 0.5s			
MEASUREMENT	Voltage (AC)	Range	0 - 350VL-N, 0 - 606VL-L, 0 - 700VL-L(Split) Option : 0 - 400VL-N, 0 - 692VL-L, 0 - 800VL-L(Split)	
		Resolution	0.01V	
		Accuracy	± (0.1% of reading + 0.2% F.S.) at Voltage > 5V	

Item		RPS-7067	RPS-7090	
MEASUREMENT	Voltage (DC)	Range	±495VDC, ±990VDC (Split phase) / Option : ±565VDC, ±1130VDC (Split phase)	
		Resolution	0.01V	
		Accuracy	± (0.1 % of reading + 0.2% F.S.) at Voltage > 5V	
	Current (AC,DC)	Range	1Ø	0.00 - 432.00A
			3Ø/Split phase	0.00 - 144.00A
		Resolution	0.01A	
		Accuracy	± (0.4% of reading + 0.3% F.S.)	
	Peak Current	Range	1Ø	0.0 - 1296.0Apk
			3Ø/Split phase	0.0 - 432.0Apk
		Resolution	0.1A	
		Accuracy	± (0.4% of reading + 0.6% F.S.)	
	Power (AC,DC)	Range	1Ø	0.0W - 67.5kW
			3Ø	0.0W - 22.5kW
			Split phase	0.0W - 45kW
		Resolution	0.1W at 0.0 - 9999.9W / 1W at Power ≥10000W	
	Accuracy	± (0.4% of reading + 0.4% F.S.)		
	Power Apparent (VA)	Range	1Ø	0.0W - 67.5kVA
			3Ø	0.0W - 22.5kVA
			Split phase	0.0W - 45kVA
		Resolution	0.1VA at 0.0 - 9999.9VA / 1VA at Power ≥10000VA	
Accuracy	V×A, Calculated value			
Power Factor	Range	0 -1.000		
	Resolution	0.001		
	Accuracy	W / VA ,Calculated and displayed to three significant digits		
Crest Factor	Range	0 - 10.00		
	Resolution	0.01		
	Accuracy	Ap / A ,Calculated and displayed to two significant digits		
GENERAL	Interface	USB, Ethernet, External I/O(DB25), Option: GPIB, CAN Bus		
	Display	Full Color, Touch LCD Display, 5" Diagonal size, 800 x 400 Pixels resolution		
	Protection	OCP, OVP, OPP, OTP, SHORT, FAN		
	V Sense	Yes		
	Efficiency (*9)	90% (Typical)		
	Dimension(H x W x D)	132.8 x 432 x 718 mm		
	Weight	60kg		
ENVIRONMENTAL	Cooling	Variable speed fan cooled, front intake, rear exhaust		
	Operating Temperature	0 to 40°C		
	Storage Temperature	-40 to 85°C		
	Altitude	2000m (6500 feet)		
	Operating Humidity(*10)	0% to 95% RAH		
REGULATORY COMPLIANCE	Safety	Low Voltage Directive 2014/30/EU, EN 61010-1:2017		
	EMC	CE marked for EMC Directive 2014/30/EU per EN 61326-1:2013 Class A		
	CE Mark LVD Categories	Installation Overvoltage Category: II; Pollution Degree: 2; indoor use only.		

Note.

- *1 Tested on input voltage 380Vac with full output power
- *2 Maximum distortion is tested on output voltage 350Vac with full output power under linear load
- *3 With respect to changes in the rated range of input voltage.
- *4 Load regulation is tested by sine wave and remote sense
- *5 At working voltage 125V

- *6 When the output voltage is greater than 40V
- *7 Current total harmonic distortion is tested on input voltage 220Vac with full output power
- *8 Power factor is tested on input voltage 220Vac with full output power
- *9 Efficiency is tested on input voltage 380V and output voltage 250Vac with full output power under linear load
- *10 In the state of non-condensing

The above specifications are subject to change without prior notice.

Technical Specifications

Item		RPS-7112		
AC INPUT	Phase	3Ø3W		
	Voltage	380 - 400 VL-L ± 10% 440 - 480 VL-L ± 10%		
	Frequency	47 - 63Hz		
	Max. Current	270A/phase (380 - 480 VL-L ± 10%)		
	Power Factor(*1)	0.99(Typical)		
AC OUTPUT	Phase Modes	3Ø, 1Ø or Split phase selectable		
	Max. Power	112.5kVA/75kVA(Split phase)		
	Per Phase/Channel	37.5kVA		
AC VOLTAGE	Range	0 - 350VL-N, 0 - 606VL-L, 0-700VL-L(Split phase) Option : 0 - 400VL-N, 0 - 692VL-L, 0-800VL-L(Split phase)		
	Resolution	0.1V		
	Setting Accuracy	± (0.1% of setting + 0.2% F.S.)		
	Total Harmonic Distortion (THD)(*2)	<0.5% @ 50/60Hz <1% @ 30-1000Hz		
	Line Regulation (*3)	± 0.1%		
	Load Regulation (*4)	± 0.2%		
	Phase Angle	Range	0 - 359.9°	
		Resolution	0.1°	
MAX. AC CURRENT	RMS(*5)	720A(1Ø)/240A(3Ø/Split)		
	Peak	2160A(1Ø)/720A(3Ø/Split)		
	Crest Factor	3		
FREQUENCY	Range	DC, 15.00 - 100.0 Hz Option : DC, 15.00 - 1500.0 Hz		
	Resolution	0.01Hz		
	Accuracy(*6)	± 0.01% F.S		
DC OUTPUT	Max. Power	112.5kW/75kW (Split phase)		
	Per Phase/Channel	37.5kW		
DC VOLTAGE	Range	±495VDC, ±990VDC(Split phase) Option : ±565VDC, ±1130VDC(Split phase)		
	Resolution	0.1V		
	Setting Accuracy	± (0.1 % of setting + 0.2% F.S.)		
MAX. DC CURRENT	Range	540A(1Ø)/180A(3Ø/Split)		
HARMONIC SYNTHESIS FUNCTION	up to 50 Harmonic orders @ 50/60Hz fundamental frequency			
REGENERATIVE FUNCTION	Current Total Harmonic Distortion (iTHD)(*7)	<6%(Typical)		
	Power Factor(*8)	>0.97(Typical)		
CURRENT LIMIT FUNCTION	Setting	Range	1Ø 3Ø/Split phase	
		Resolution	0.1A	
	Accuracy	± (2.0% of setting + 0.5% F.S.)		
	Response Time	< 0.5s		
MEASUREMENT	Voltage (AC)	Range	0 - 350VL-N, 0 - 606VL-L, 0 - 700VL-L(Split) Option : 0 - 400VL-N, 0 - 692VL-L, 0 - 800VL-L(Split)	
		Resolution	0.01V	
		Accuracy	± (0.1% of reading + 0.2% F.S.) at Voltage > 5V	

Item		RPS-7112		
MEASUREMENT	Voltage (DC)	Range	±495VDC, ±990VDC (Split phase) / Option : ±565VDC, ±1130VDC (Split phase)	
		Resolution	0.01V	
		Accuracy	± (0.1 % of reading + 0.2% F.S.) at Voltage > 5V	
	Current (AC,DC)	Range	1Ø	0.00 - 720.00A
			3Ø/Split phase	0.00 - 240.00A
		Resolution	0.01A	
	Peak Current	Range	1Ø	0.0 - 2160.0Apk
			3Ø/Split phase	0.0 - 720.0Apk
		Accuracy	± (0.4% of reading + 0.3% F.S.)	
	Power (AC,DC)	Range	1Ø	0.0W - 112.5kW
			3Ø	0.0W - 37.5kW
			Split phase	0.0W - 75kW
	Resolution	0.1W at 0.0 - 9999.9W / 1W at Power ≥10000W		
	Accuracy	± (0.4% of reading + 0.4% F.S.)		
	Power Apparent (VA)	Range	1Ø	0.0W - 112.5kVA
			3Ø	0.0W - 37.5kVA
			Split phase	0.0W - 75kVA
	Resolution	0.1VA at 0.0 - 9999.9VA / 1VA at Power ≥10000VA		
	Accuracy	V×A, Calculated value		
	Power Factor	Range	0 -1.000	
		Resolution	0.001	
Accuracy		W / VA ,Calculated and displayed to three significant digits		
Crest Factor	Range	0 - 10.00		
	Resolution	0.01		
	Accuracy	Ap / A ,Calculated and displayed to two significant digits		
GENERAL	Interface	USB, Ethernet, External I/O(DB25), Option: GPIB, CAN Bus		
	Display	Full Color, Touch LCD Display, 5" Diagonal size, 800 x 400 Pixels resolution		
	Protection	OCP, OVP, OPP, OTP, SHORT, FAN		
	V Sense	Yes		
	Efficiency (*9)	90% (Typical)		
	Dimension(H x W x D)	132.8 x 432 x 718 mm		
	Weight	60kg		
ENVIRONMENTAL	Cooling	Variable speed fan cooled, front intake, rear exhaust		
	Operating Temperature	0 to 40°C		
	Storage Temperature	-40 to 85°C		
	Altitude	2000m (6500 feet)		
	Operating Humidity(*10)	0% to 95% RAH		
REGULATORY COMPLIANCE	Safety	Low Voltage Directive 2014/30/EU, EN 61010-1:2017		
	EMC	CE marked for EMC Directive 2014/30/EU per EN 61326-1:2013 Class A		
	CE Mark LVD Categories	Installation Overvoltage Category: II; Pollution Degree: 2; indoor use only.		


Note.

- *1 Tested on input voltage 380Vac with full output power
- *2 Maximum distortion is tested on output voltage 350Vac with full output power under linear load
- *3 With respect to changes in the rated range of input voltage.
- *4 Load regulation is tested by sine wave and remote sense
- *5 At working voltage 125V

- *6 When the output voltage is greater than 40V
- *7 Current total harmonic distortion is tested on input voltage 220Vac with full output power
- *8 Power factor is tested on input voltage 220Vac with full output power
- *9 Efficiency is tested on input voltage 380V and output voltage 250Vac with full output power under linear load
- *10 In the state of non-condensing


The above specifications are subject to change without prior notice.

RPS-7000 Dimensions

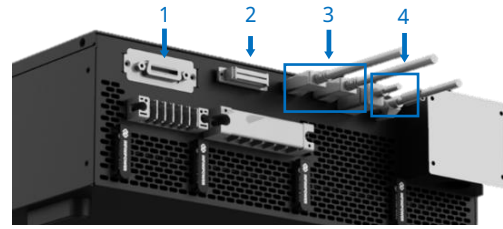

- 1 GPIB/CAN Optional Card
- 2 External I/O (AC_ON, FAULT-OUT, Ext-ON/OFF, etc.).
- 3 Parallel Communication Interface
- 4 Type-B USB, Network control interface

Ordering Information

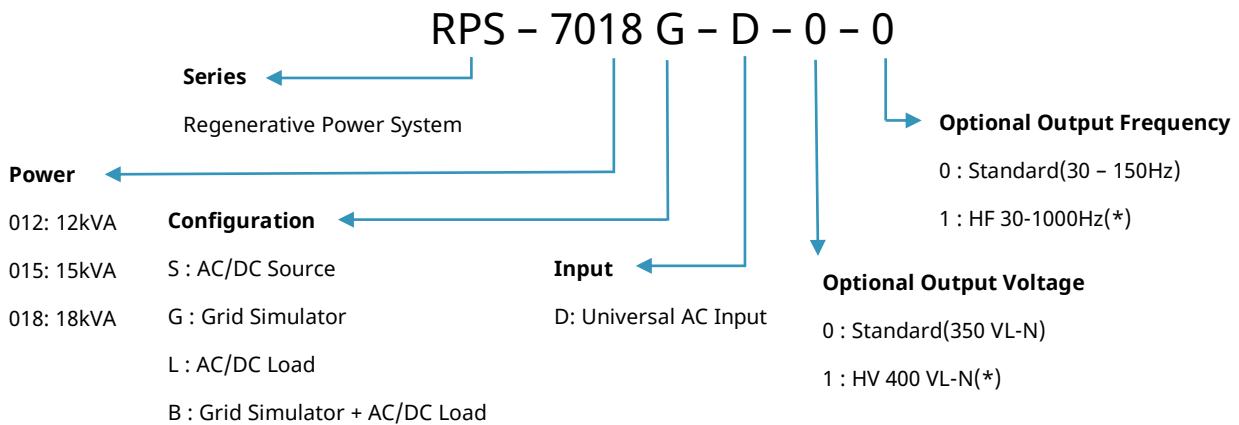

* Special specifications, please contact the INFINIPOWER Tech. office or your local distributor

Accessories list

Typical Delivery Items	Optional accessories
<ul style="list-style-type: none"> ■ Regenerative Power System ■ USB cable (Type A to Type B) (1.5m) ■ LAN cable CAT5E(2m) ■ DB25 adapter board (for I/O signal) ■ Test Report ■ Certificate of Compliance ■ Output shorting adapter (for single phase mode) 	<ul style="list-style-type: none"> ■ Parallel cable (Display port) (1.2m) ■ CAN Bus interface card / CAN Bus cable(1.5m) ■ GPIB cable(1.5m) ■ DB25 (male to male) adapter ■ RPS-7000 series input power cable (3m) ■ Output voltage calibration fixture(Remote sense cable)

* Special specifications, please contact the INFINIPOWER Tech. office or your local distributor

About INFINIPOWER

With 20+ years of R&D expertise in power testing, INFINIPOWER team delivers industry-leading solutions with trusted performance, precision, and stability. Backed by world-class manufacturing and TÜV certification, INFINIPOWER empowers customers—powering trust, driving innovation in the new energy era.